

Product profile

The third-generation KQDP/KQDQ light vertical multi-stage centrifugal pump is based on the concept of energy saving, environmental protection, safety and reliability, adopting a new industrial and hydraulic design method, and the latest independent research and development of a new generation of products. The product is suitable for different temperature, flow and pressure ranges. It can transport various media from tap water to industrial liquid. It is widely used in water supply, industrial pressurization, industrial liquid transportation, heating supply, irrigation and water treatment, The KQDQ can also be used in the fields of beverages, medicine and etc.. KQDP is suitable for non-corrosive liquids and KQDQ is suitable for mildly corrosive liquids.

This product complies with GB/T 5657-2013 "Technical Conditions for Centrifugal Pumps (III)".

Product feature



High efficiency, energy saving, green and environmental protection: the efficiency index has reached the international leading level, and the energy efficiency index has reached $MEI \geq 0.7$.



Compact, safe and reliable: under the same flow head parameters, the pump has lower height, less vibration, lower noise, smaller footprint and lighter weight.



Durable and easy to repair: It adopts special configuration of cartridge mechanical seal to ensure smooth operation and no leakage in slight vibration and impact environment. At the same time, the machine seal position is designed with sufficient disassembly and assembly space, and the maintenance is convenient. When the machine seal is replaced, there is no need to disassemble the pump.

Typical application



Water supply: secondary water supply for high-rise buildings, filtration, transportation, supercharged water
 Industrial pressure: cleaning system, process water system, high pressure flushing system, fire fighting system
 Industrial liquid transport: boiler feed water, condensing system, machine tool components
 Heating supply: air conditioning system
 Irrigation: farmland irrigation, sprinkler irrigation, drip irrigation
 Water treatment: swimming pool, distillation system, etc.

Working conditions



Liquid: Clean, thin, non-flammable, explosive and free of particles and fibers or liquids with physicochemical properties similar to water

Liquid temperature: $-20\text{ }^{\circ}\text{C}$ to $+105\text{ }^{\circ}\text{C}$

Ambient temperature: max. $+40\text{ }^{\circ}\text{C}$


Altitude: height less than 1000m

Maximum operating pressure: KQDP, KQDQ type suction pressure + pump maximum pressure $\leq 2.5\text{Mpa}$ and inlet pressure $\leq 1.0\text{Mpa}$

Note: Please consult the technical department of the company if the temperature is higher than $70\text{ }^{\circ}\text{C}$ or other special conditions.



Specification

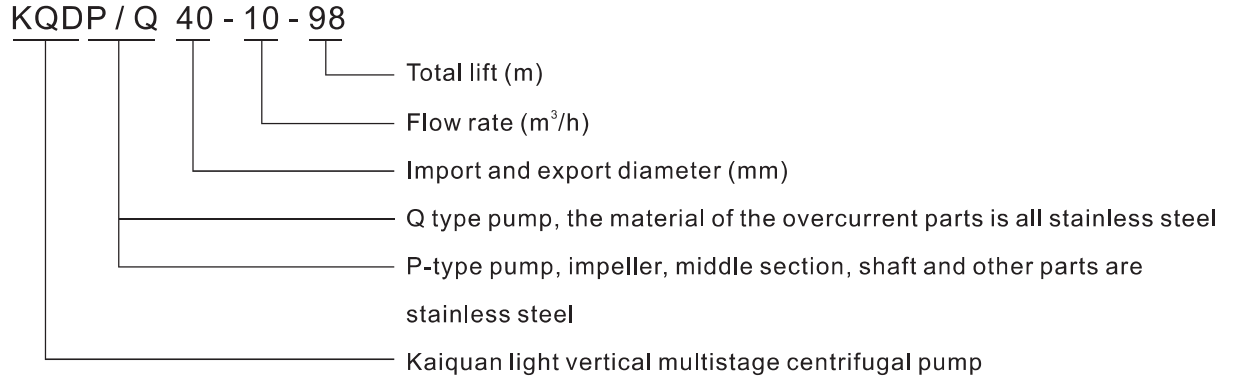

Motor

Fully enclosed self-cooling squirrel-cage high-efficiency three-phase asynchronous motor, which is 2%~10% more efficient than ordinary motors. Motor bearings are equipped with SKF or NSK bearings.

Standard voltage: 3×380-415V Frequency: 50Hz

Protection level: Ip55

Insulation class: F

Installation form: B14 or V1

Note: Outdoor type, plateau type, explosion-proof motor, thermal protection and other special motor, the order will be explained separately

The matching motor is the national standard energy efficiency level 2 or 3, and is configured according to customer requirements.

Suction and ischarge flange

The KQDP32 and 40 are equipped with an oval flange as standard. The factory is equipped with a pair of cast iron elliptical flanges (thread joints) and optional round flange connection.

KQDQ32 comes standard with external pipe thread connection, optional bayonet type and flange connection.

The KQDQ40 comes standard with a round flange and an optional bayonet coupling.

KQDP/Q50 and 65 are equipped with round flanges, of which KQDQ50 can be connected by bayonet.

Special note: 1. Elliptical flange connection withstand voltage rating of 1.6Mpa and below, greater than 1.6Mpa, please use round flange connection;

2. All standard flanges are designed according to GB/T17241.6-2008, and the pressure rating is PN 2.5 Mpa;

3. Paired flanges and pipe clamps for pipe connection, which must be ordered separately.

Maximum suction height

When using the user, the influence of various factors on the use should be considered. The maximum suction height H should be lower than the calculated value (negative value is reversed). Otherwise, the pump will not work properly.

$$H = P_b \times 10.2 - NPSH - H_f - H_v - H_s$$

P_b = local atmospheric pressure bar (sea level 1 bar) In a closed system, P_b is the system pressure bar

NPSH = NPSH m H_f = inlet line loss m

H_v = liquid saturated vapor pressure m H_s = safety margin ≥ 0.5 m

Example: Assume atmospheric pressure $P_b = 1$ bar, pump NPSH NPSH = 2m, suction line loss $H_f = 2.2$ m

(1) When the liquid temperature is 20 °C, the saturated vapor pressure $H_v = 0.23$ m


$$H = 1 \times 10.2 - 2 - 2.2 - 0.23 - 0.5 = 5.27 \text{ m (the larger the positive value, the less likely it is to cavitation)}$$

(2) When the liquid temperature is 85 °C, the saturated vapor pressure $H_v = 5.89$ m

$$H = 1 \times 10.2 - 2 - 2.2 - 5.89 - 0.5 = -0.39 \text{ m (negative value means the pump needs to be poured, the inlet is pressurized)}$$


The temperature of the liquid delivered by the pump is inconsistent. When the other conditions of use of the pump are the same, the suction height is also different.

Water physical properties			
water temperature T/°C	Saturated vapor pressure Hv/m	Water temperature T/°C	saturated vapor pressure Hv/m
5	0.09	90	7.15
10	0.13	95	8.62
20	0.23	100	10.33
30	0.43	105	12.32
40	0.75	110	14.61
50	1.26	115	17.24
60	2.03	120	20.25
70	3.18	125	23.67
80	4.83	130	27.55
85	5.89	135	31.92

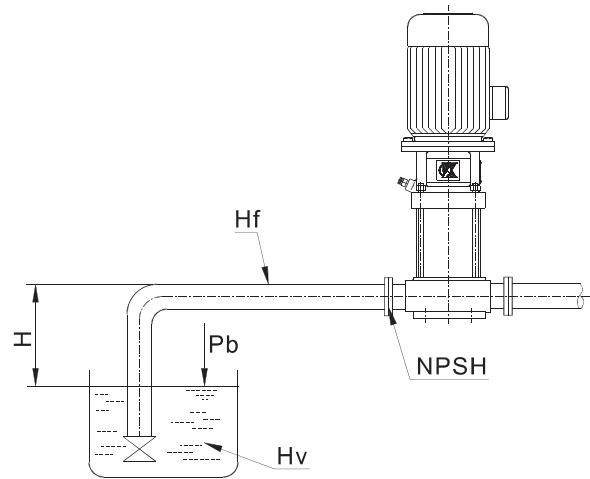

Maximum ambient temperature and altitude

When the pump is operated under ambient temperature higher than 40 °C or altitude more than 1000 m, the motor output power P2 will be reduced due to low air density and poor cooling effect. Therefore, the power of the pump with the motor needs to be increased (see the following figure for details).

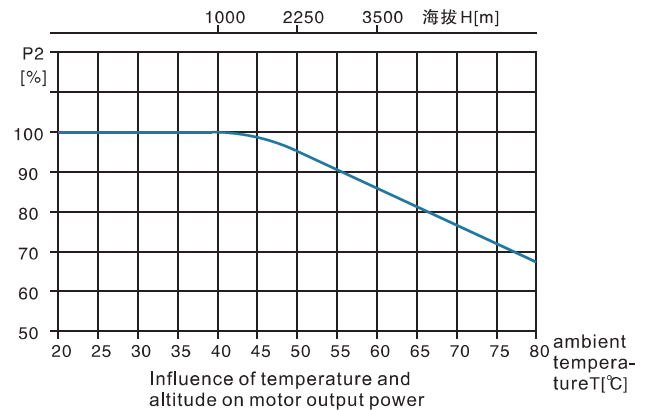

Shaft seal

Mechanical seal: Cartridge-style maintenance-free mechanical seal for easy maintenance

Basic configuration: The rubber material is fluoro rubber, and the dynamic and static rings are made of hard alloy. The graphite is resistant to slight vibration and impact, which is more reliable.

Material

KQDQ type overcurrent parts are all 304, motor bracket is QT
 KQDP type impeller, middle section over-current part is 304, inlet and outlet section, bracket is HT

Water pump steering



KQDP and KQDQ are rotated counterclockwise from the driver side (see the figure on the right)

Motor junction box


KQDP, KQDQ See from the motor end, the junction box is on the water outlet side

Remark: The installation position of the junction box can be replaced. If there is any demand, please indicate in the order information.


KQDP, KQDQ

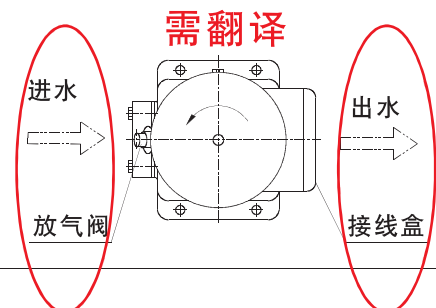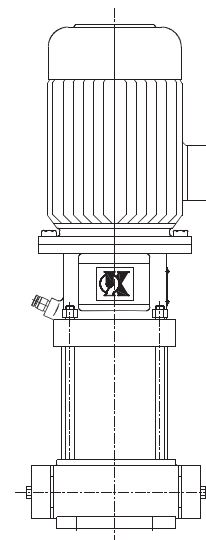

Structure chart
KQDP40-8、40-10、50-12



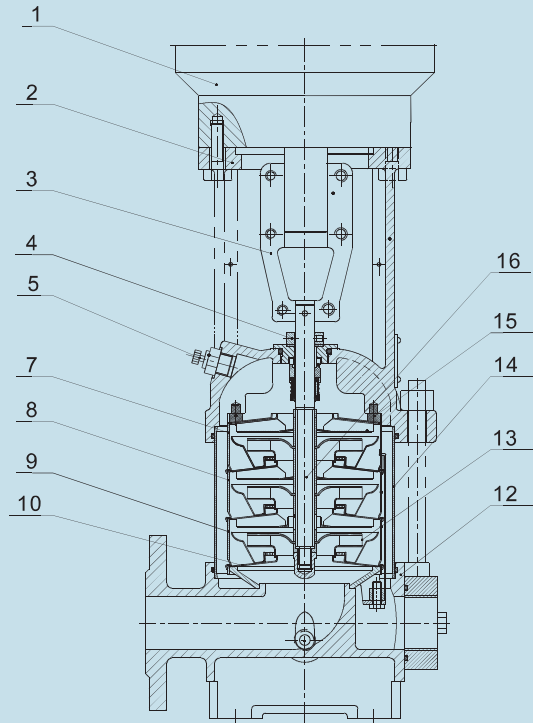


KQDQ40-8、40-10、50-12

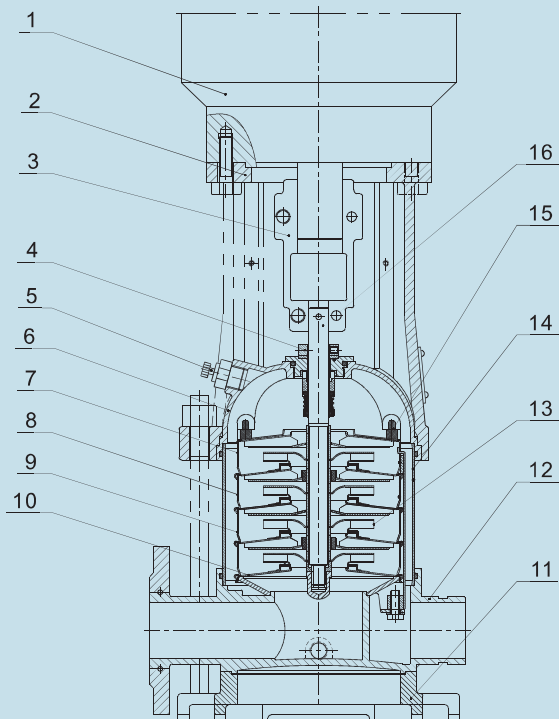

Material list
KQDP/Q40-8、40-10、50-12


No.	Name	Material	AISI/ASTM
1	Motor		
2	Support	Cast iron	ASTM25B
3	Clamped coupling	Powder metallurgy /ductile iron	
4	Modular mechanical seals	SIC/C/FPM	
5	Deflation valve	Stainless steel	AISI304
7	Discharge middle-stage	Stainless steel	AISI304
8	Middle-stage	Stainless steel	AISI304
9	Bearing middle-stage	Stainless steel	AISI304
10	Inflow middle-stage	Stainless steel	AISI304
13	Impeller	Stainless steel	AISI304
14	Outer shell	Stainless steel	AISI304
15	Elastic ring	Stainless steel	
16	Shaft	Stainless steel	AISI304
KQDP			
12	Inflow discharge stage	Cast iron	ASTM25B
KQDQ			
6	Pump cover	Stainless steel	AISI304
11	Baseboard	Cast iron	ASTM25B
12	Inflow discharge stage	Stainless steel	AISI304

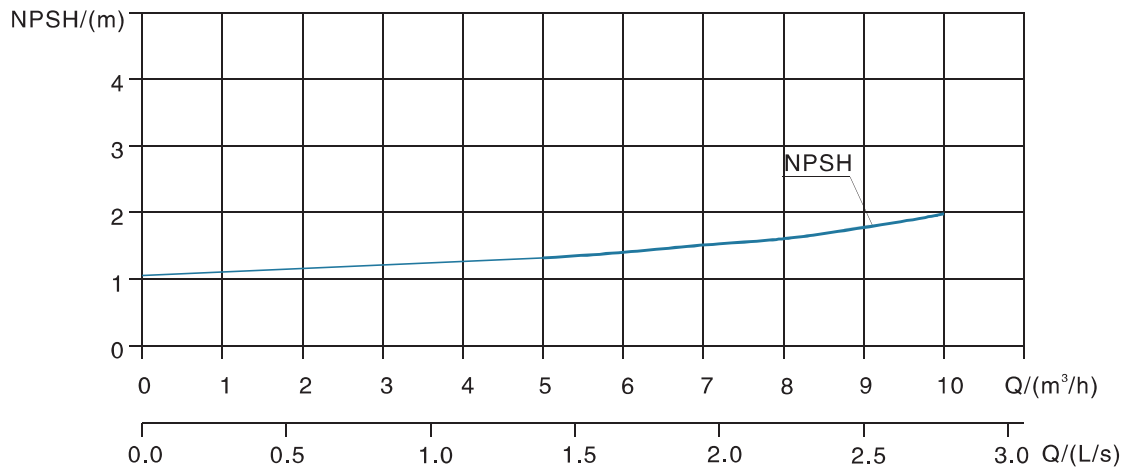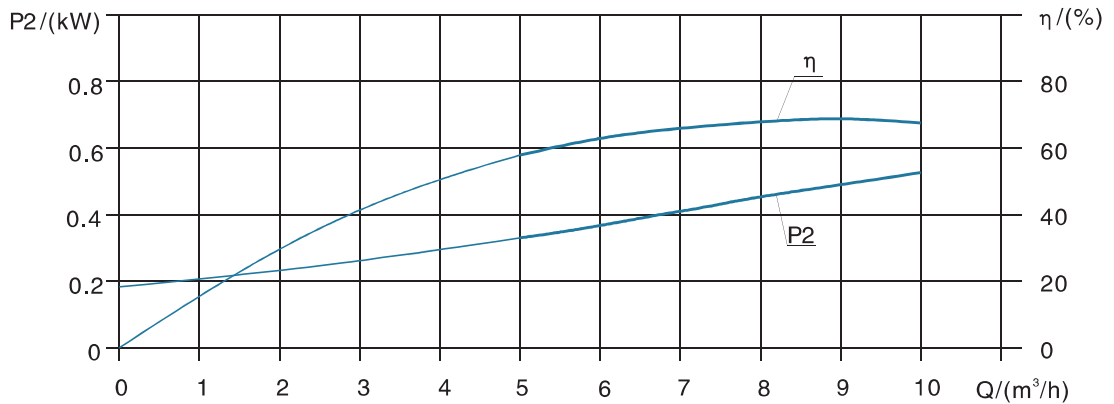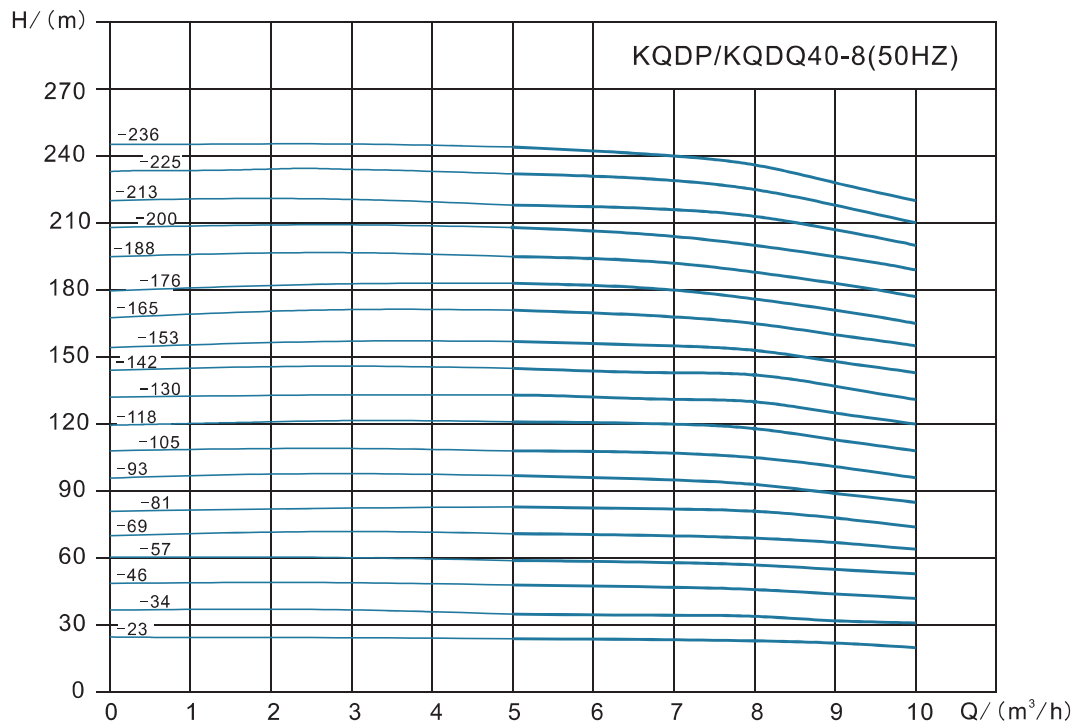Performance curve


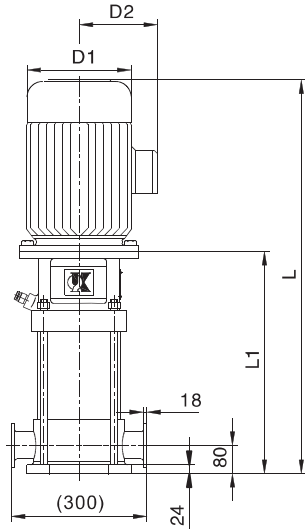
KQDP/KQDQ40-8 Performance table								
No.	Type	Motor power (kW)	Q (m ³ /h)	5	7	8	9	10
1	40-8-23	1.1	H (m)	24	23.5	23	22	20
2	40-8-34	1.5		35	34.5	34	32	31
3	40-8-46	2.2		48	47	46	44	42
4	40-8-57	2.2		59	58	57	55	53
5	40-8-69	3		71	70	69	67	64
6	40-8-81	3		83	82	81	78	74
7	40-8-93	4		97	95	93	89	85
8	40-8-105	4		109	107	105	101	96
9	40-8-118	5.5		121	120	118	113	108
10	40-8-130	5.5		133	131	130	125	120
11	40-8-142	5.5		145	143	142	137	131
12	40-8-153	7.5		157	155	153	148	143
13	40-8-165	7.5		171	168	165	160	155
14	40-8-176	7.5		183	180	176	171	165
15	40-8-188	7.5		195	192	188	183	177
16	40-8-200	7.5		208	204	200	195	189
17	40-8-213	7.5		218	216	213	207	200
18	40-8-225	11		232	229	225	218	210
19	40-8-236	11		244	240	236	228	220

Installation drawing



KQDP40-8

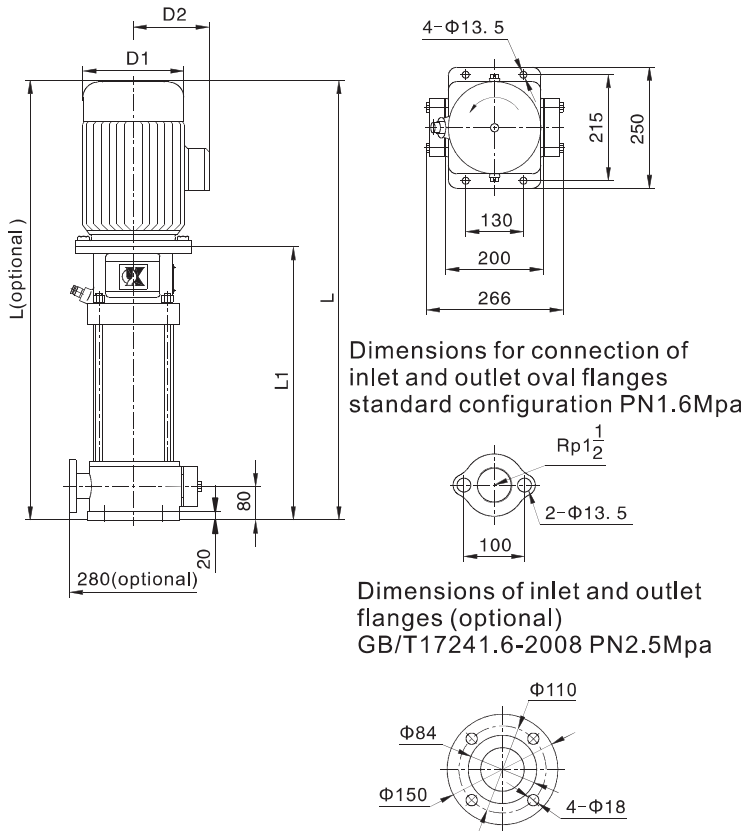



KQDP40-8 Dimension table								
No.	Type	L1	L	D1	D2	Weight		
	Style	(mm)	(mm)	(mm)	(mm)	(kg)		
1	40-8-23	365	620	148	96	38		
2	40-8-34	395	695	166	115	42		
3	40-8-46	425	725			45		
4	40-8-57	455	755	191	128	47		
5	40-8-69	495	820			56		
6	40-8-81	525	850	212	140	58		
7	40-8-93	555	910			67		
8	40-8-105	585	940	258	163	69		
9	40-8-118	645	1075			91		
10	40-8-130	675	1105			93		
11	40-8-142	705	1135			95		
12	40-8-153	735	1165			96		
13	40-8-165	765	1195			97		
14	40-8-176	795	1225			99		
15	40-8-188	825	1255			101		
16	40-8-200	855	1285			102		
17	40-8-213	885	1315			103		
18	40-8-225	983	1481			314	251	114
19	40-8-236	1013	1511					116

Installation drawing
KQDQ40-8


Dimensions of inlet and outlet flanges (optional)
GB/T17241.6-2008 PN2.5Mpa




Connection dimensions for inlet and outlet threads
(standard configuration)
standard configuration PN1.6Mpa



KQDQ40-8 Dimension table						
No.	Type	L1	L	D1	D2	Weight
	Style	(mm)	(mm)	(mm)	(mm)	(kg)
1	40-8-23	373	628	148	96	38
2	40-8-34	403	703	166	115	42
3	40-8-46	433	733			45
4	40-8-57	463	763	191	128	47
5	40-8-69	503	828			56
6	40-8-81	533	858	212	140	58
7	40-8-93	563	918			67
8	40-8-105	593	948	258	163	69
9	40-8-118	653	1083			91
10	40-8-130	683	1113			93
11	40-8-142	713	1143			95
12	40-8-153	743	1173			96
13	40-8-165	773	1203			97
14	40-8-176	803	1233			99
15	40-8-188	833	1263	314	251	101
16	40-8-200	863	1293			102
17	40-8-213	893	1323			103
18	40-8-225	991	1489			114
19	40-8-236	1021	1519	116		


Basic size installation

KQDP、KQDQ Installation drawing

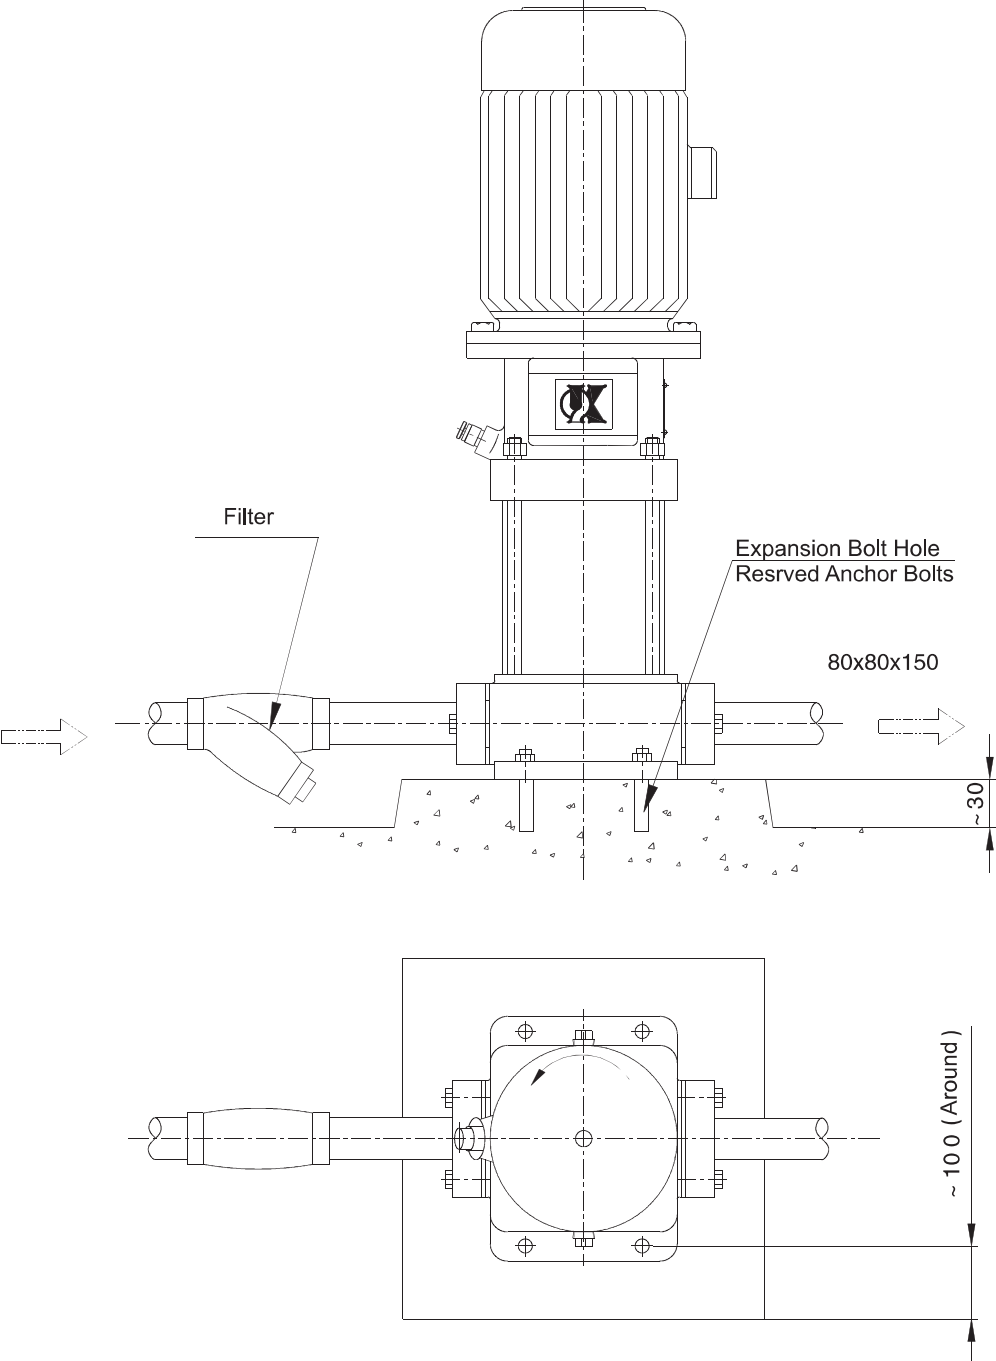


Optional Attachment:
Flexible tube card


The relative dislocation and angle deviation are allowed, and the gap between the two ends can be adapted to the expansion and contraction of the pipeline.

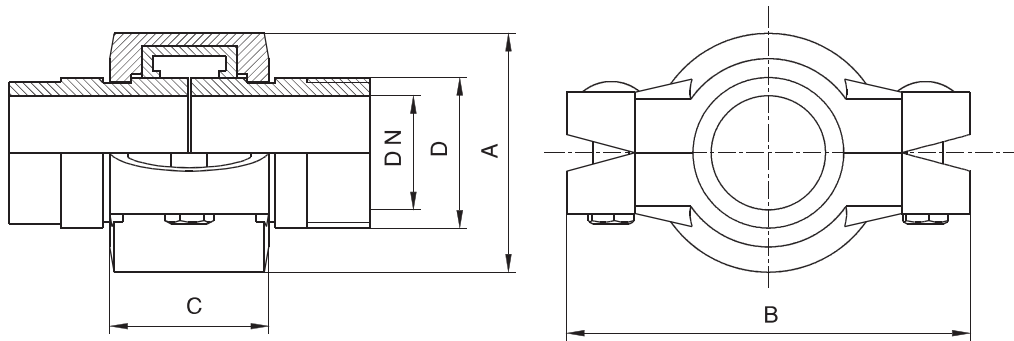

Steel tube		Pressure MPa	Allow maximum deflection angle	Shape Size mm		
Caliber DN	Outer diameter D mm			A	B	C
1 1/4"	42.2	3.5	3°	67	113	44.5
1 1/2"	48.3	3.5	3°	79	114	44.5
2"	60.3	3.5	3°	89	130	48


Welding joint


Caliber DN	D1	L	L1
1 1/4"	38	40	30
1 1/2"	45	40	32
2"	57	45	35

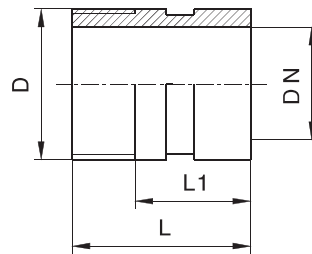Thread pipe joint


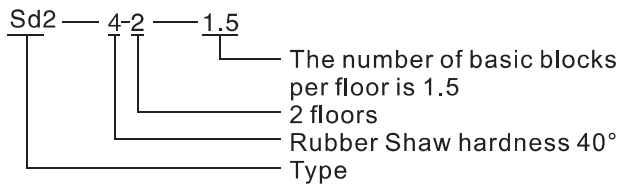
Caliber DN	D1	L	L1
1 1/4"	ZG1 1/4"	53	30
1 1/2"	ZG1 1/2"	55	32
2"	ZG2"	58	35

Flexible Installation Foundation Size Chart

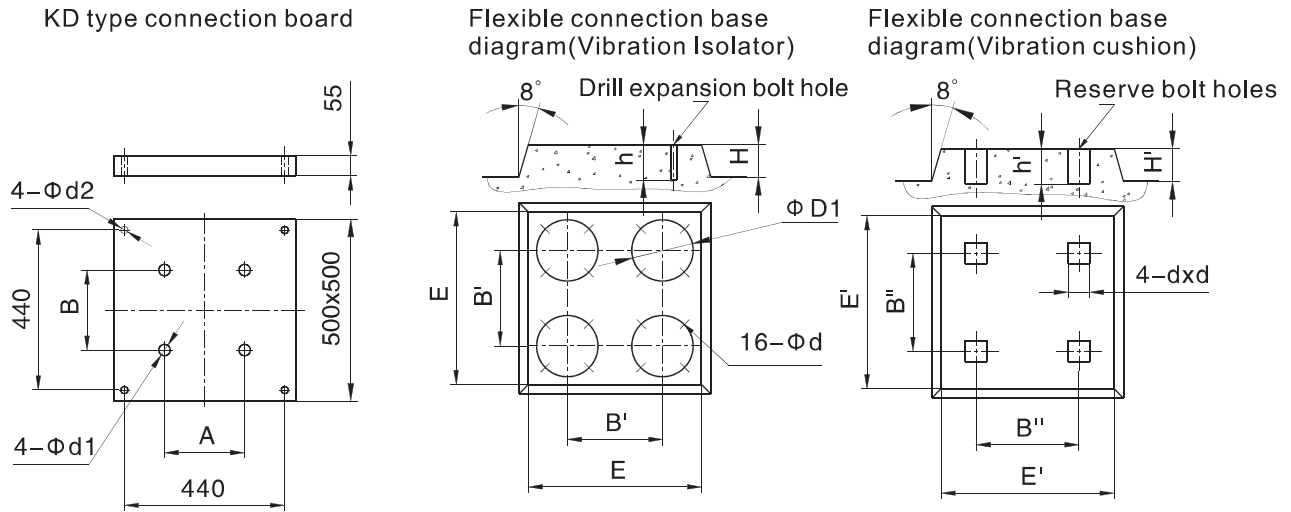

KD type connection board size					Flexible connection base diagram (Vibration Isolator)						Flexible connection base diagram (Vibration cushion)				
型号	A	B	Φd1	Φd2	H	E	B'	D1	Φd	h	H'	E'	B''	dxd	h'
KD-1/KQDP32	100	180	13	14	150	750	440	Vibration Isolator ΦD1	14	100	150	750	440	90	250
KD-1/KQDP40	130	215	13	14											
KD-1/KQDP50	130	215	13	17.5											
KD-1/KQDP65	170	240	14	17.5											

Example




Type Description


Rubber hardness in type; 4 acts for 40°、6 acts for 60°、8 acts for 80°。

JG type vibration Isolator mounting dimensions

Type	M	D	D1	H	d
JG1-1 JG1-2	10	100	80	43	8.5
JG2-1 JG2-2	12	150	130	65	8.5
JG3-1 JG3-2	16	200	170	87	12.5
JG4-1 JG4-2	20	290	260	133	12.5

Basic block size of SD2 Vibration cushion

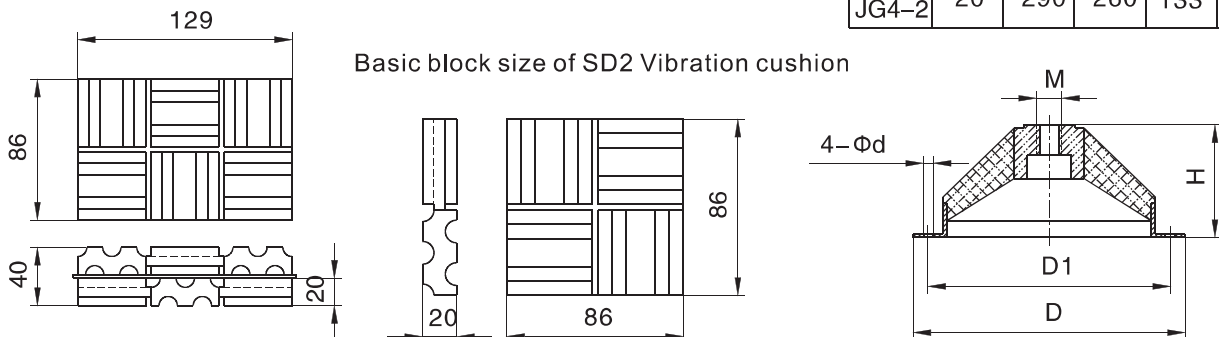

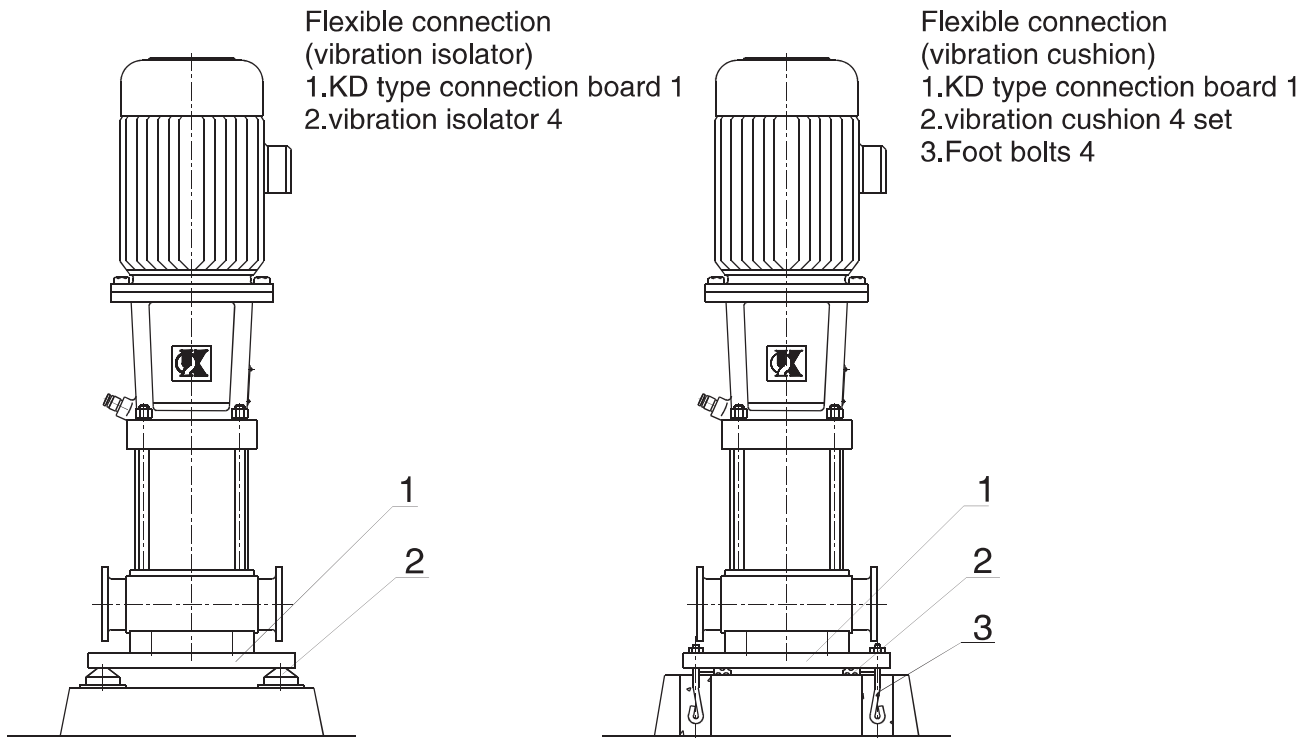

KQDP(Q) Vibration Isolator configuration table						
Type	Head	KD type connection board	vibration isolator	vibration cushion	foot bolts	
KQDP (Q) 32-4	17~92	KD-1/KQDP32	JG2-1	SD2-4-1-0.5	M10x150 4	
	101~217		JG2-2	SD2-6-1-0.5		
KQDP (Q) 32-5	12~73		JG2-1	SD2-4-1-0.5		
	81~212		JG2-2	SD2-6-1-0.5		
KQDP (Q) 40-8	23~176		KD-1/KQDP40	JG2-2		SD2-6-1-0.5
KQDP (Q) 40-10	21~166					
KQDP (Q) 50-12	25~94					
KQDP (Q) 50-15	29~102					
KQDP (Q) 50-16	28~100					
KQDP (Q) 50-20	28~74					
KQDP (Q) 40-8	188~236	KD-1/KQDP50	JG3-1	SD2-6-1-1		
KQDP (Q) 40-10	178~226					
KQDP (Q) 50-12	107~196					
KQDP (Q) 50-15	117~212					
KQDP (Q) 50-16	115~206					
KQDP (Q) 50-20	90~195					
KQDP (Q) 65-32	14~106	KD-1/KQDP65	JG3-1	SD2-6-1-1	M12x200 4	
	123~220		JG3-2	SD2-6-1-1.5		