


4CA/4CAT - 4CAX/4CATX EN 733 ~ 1450 r.p.m.

150-315

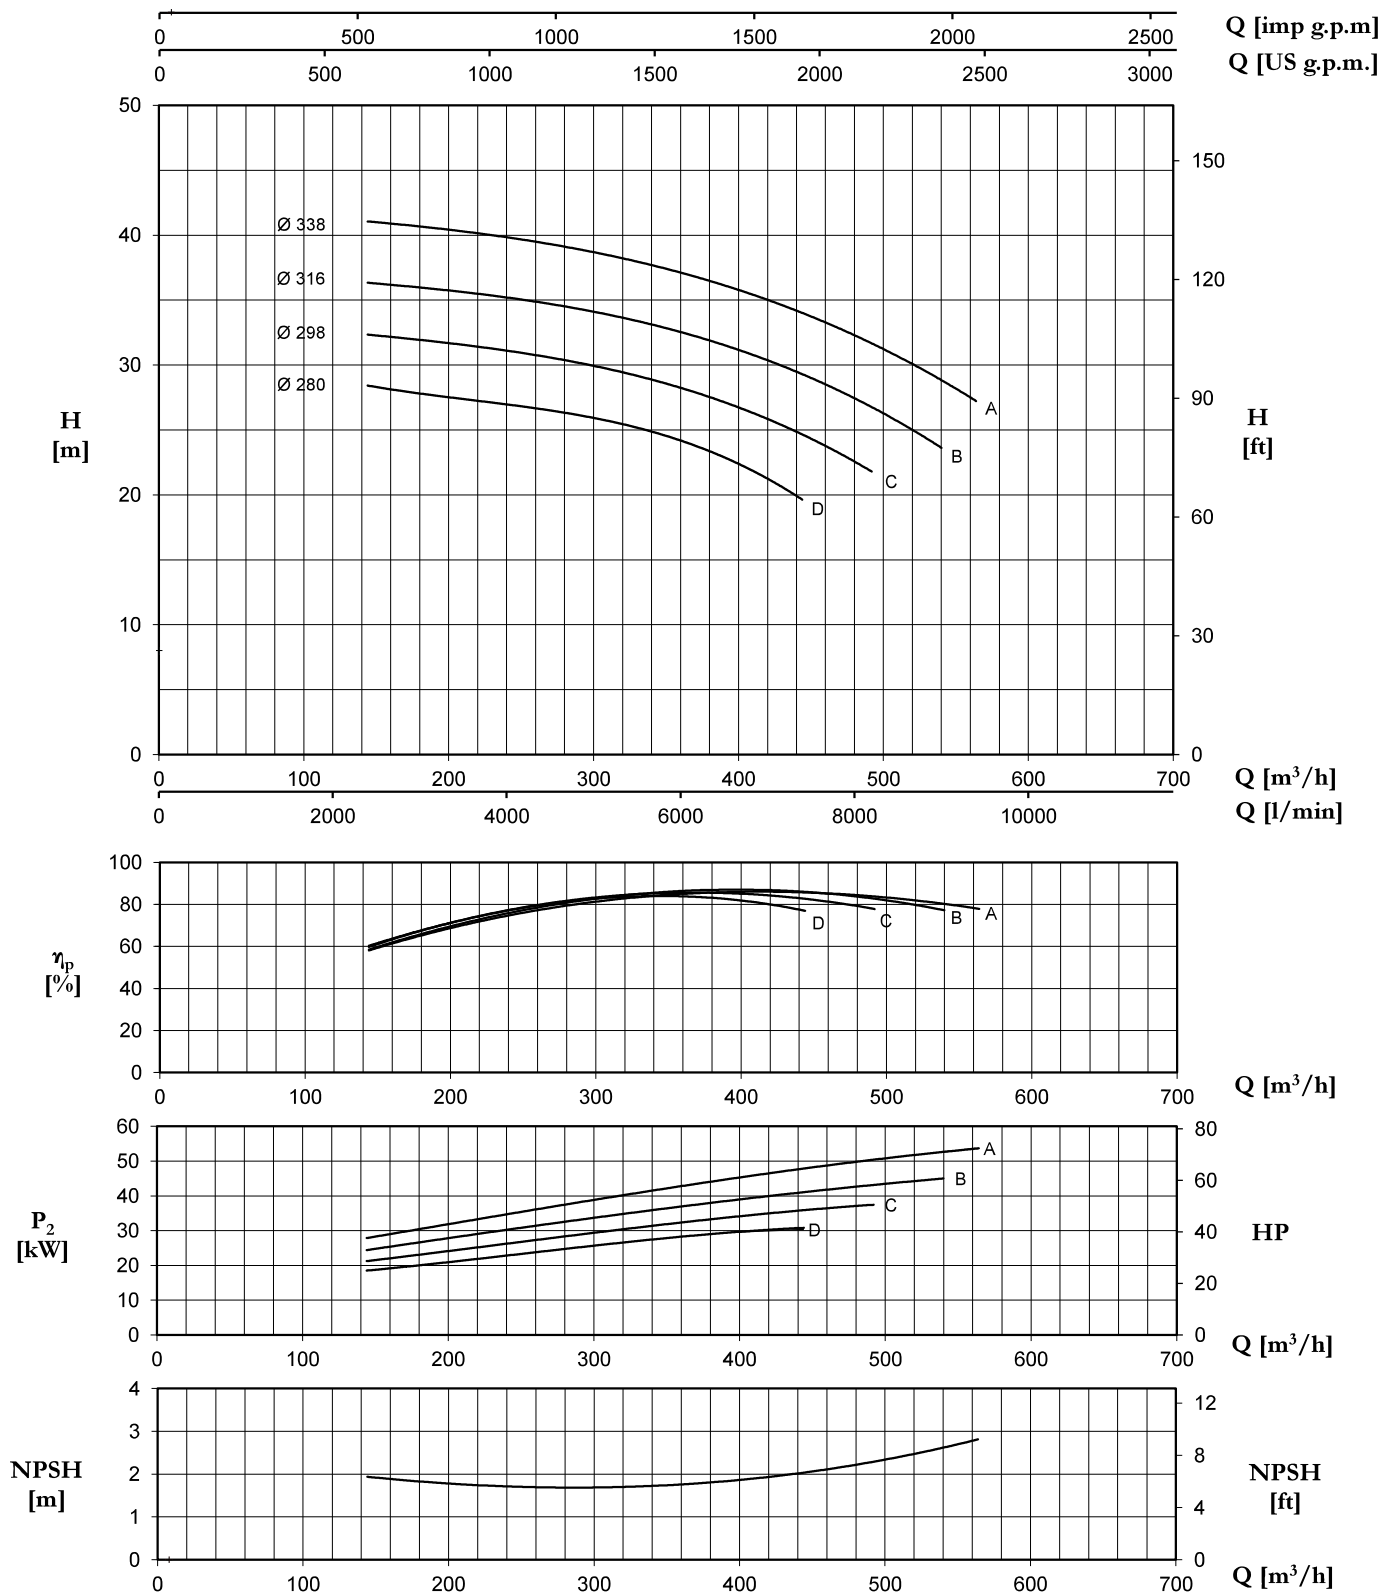

Tolerance: ISO 9906:2012 - Grade 3B

TYPE	Nominal Power (kW)	Motor Size	Q (m³/h - l/min)										
			0	144	192	228	252	348	396	444	492	540	564
			0	2400	3200	3800	4200	5800	6600	7400	8200	9000	9400
H (m)													
pump input power (kW)													
150-315D	30	200L	25,7 12,22	28,3 18,44	27,9 20,71	27,2 22,23	26,5 23,25	24,7 27,81	22,7 29,56	19,6 30,78			
150-315C	37	225S	29,6 14,01	32,2 21,16	32,1 23,85	31,3 25,58	30,7 26,73	28,6 31,79	27,0 34,00	24,7 35,84	21,8 37,45		
150-315B	45	225M	34,0 16,47	36,3 24,33	36,0 27,47	35,4 29,51	34,9 30,83	32,8 36,29	31,3 38,77	29,3 41,13	26,9 43,09	23,6 44,99	
150-315A	55	250M	39,4 18,39	41,0 27,78	40,8 31,31	40,0 33,92	39,5 35,59	37,6 41,75	35,8 45,02	34,1 48,12	31,7 50,36	28,9 52,60	27,2 53,65