


4CA - 4CAX (No EN 733) ~ 1450 r.p.m.

250-315

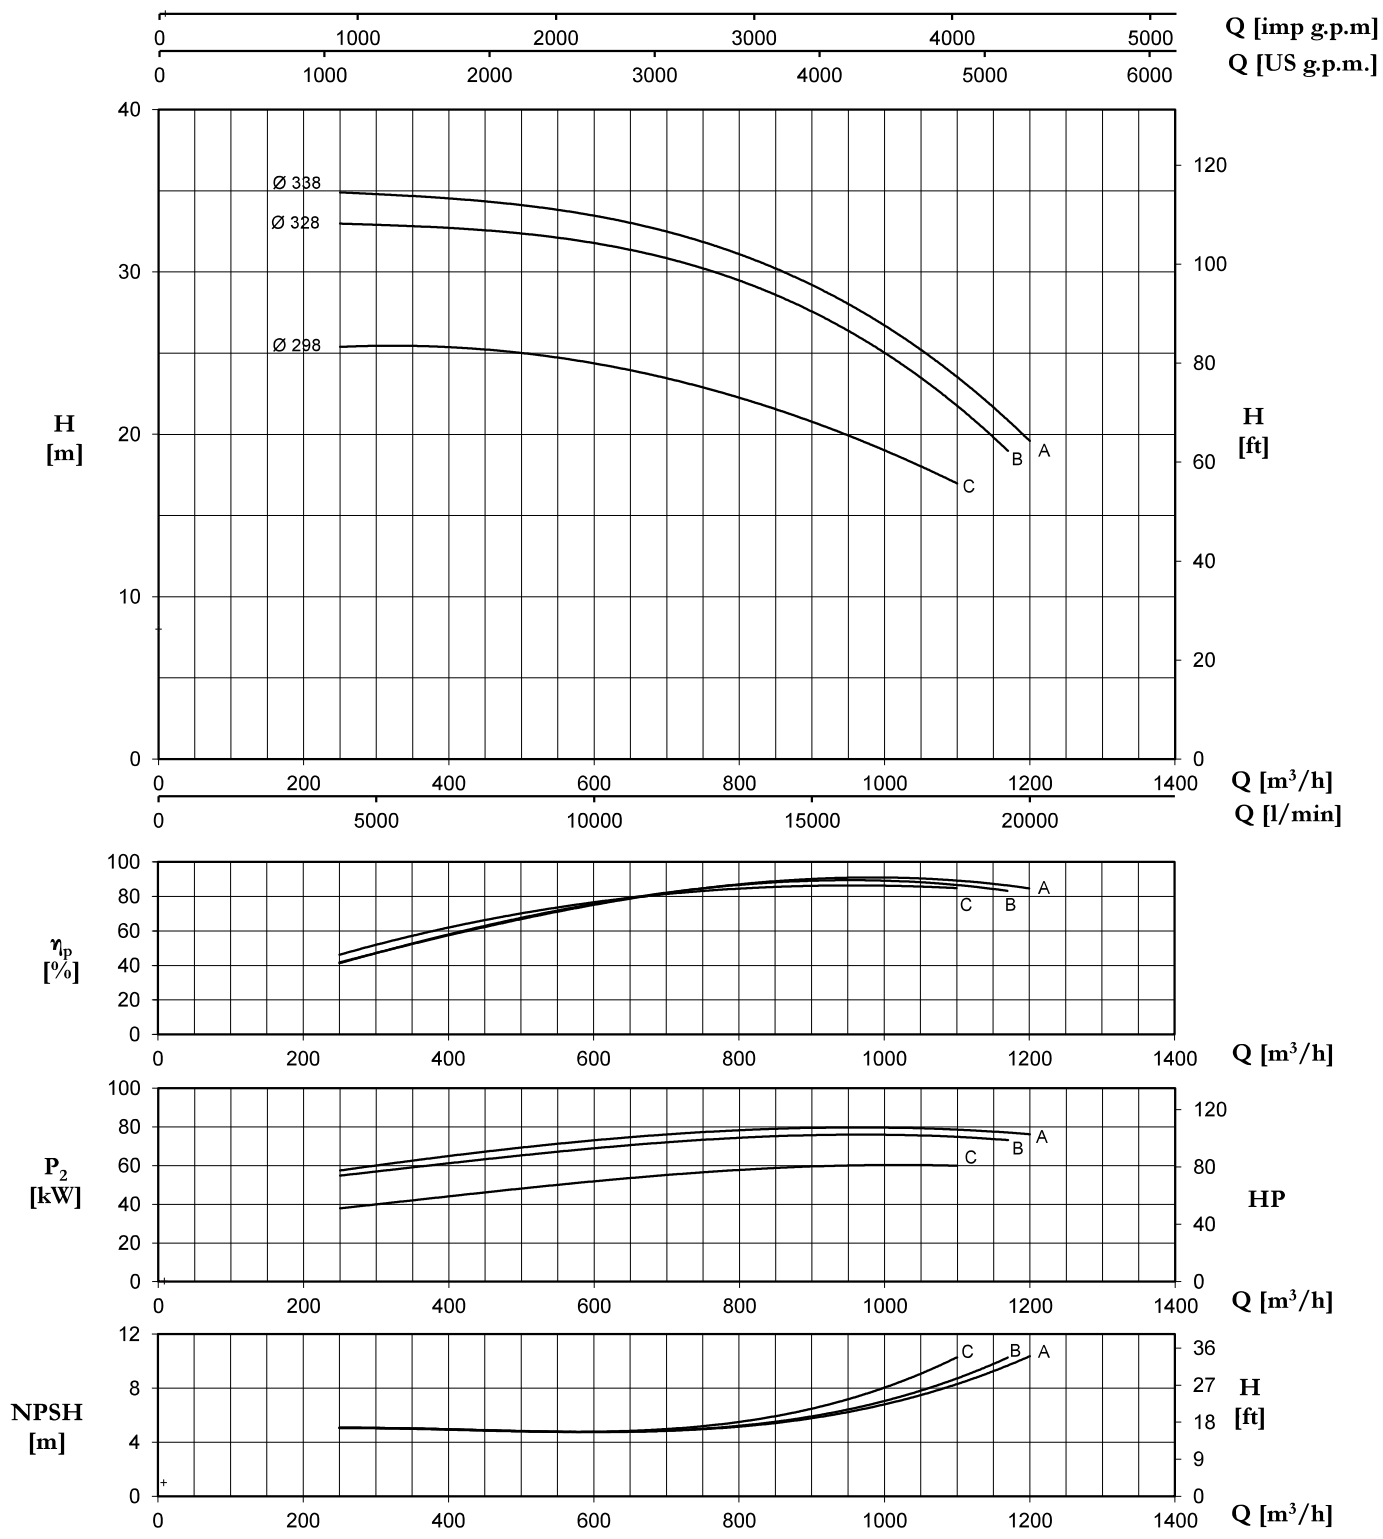

Tolerance: ISO 9906:2012 - Grade 3B

TYPE	Nominal Power (kW)	Motor Size	Q (m³/h - l/min)									
			0	250	400	600	800	850	900	1100	1170	1200
			0	4167	6667	10000	13333	14167	15000	18333	19500	20000
H (m)												
pump input power (kW)												
250-315C	55	250M	26,1	25,5	25,3	24,1	22,3	21,7	21,0	16,8		
	75	280S	28,00	37,82	44,23	51,71	57,65	58,82	59,57	59,89		
250-315B	75	280S	33,2	33,0	32,7	31,8	29,6	28,6	27,5	21,7	19,0	
			43,46	54,77	61,20	68,72	74,57	75,26	75,64	74,47	73,35	
250-315A	90	280M	35,8	35,0	34,4	33,3	31,3	30,4	29,3	23,0	20,7	20,0
			46,41	57,61	64,50	73,28	78,44	79,01	79,32	78,27	77,03	76,36