


~ 1450 r.p.m. 4CA - 4CAX (No EN 733)

250-400

CENTRIFUGHE / CENTRIFUGAL / CENTRIFUGAS / CENTRIFUGES

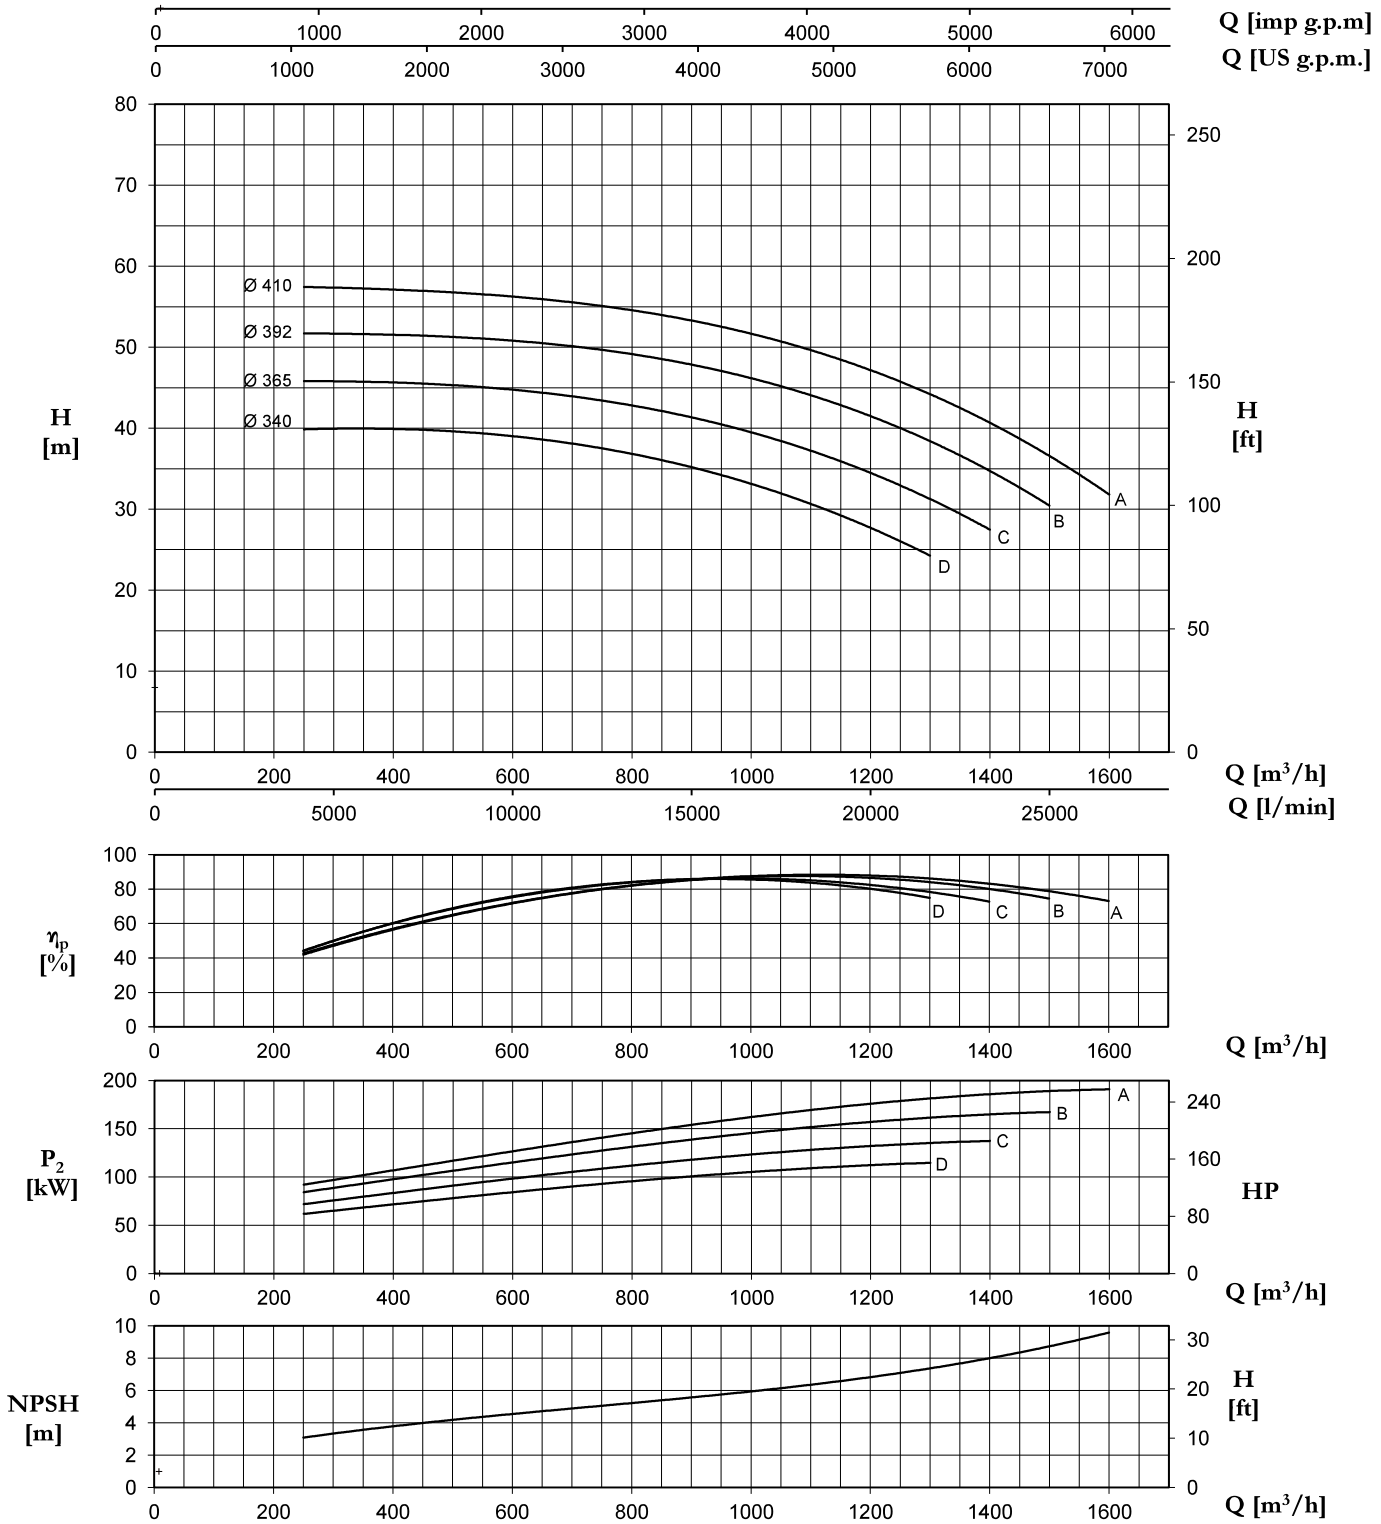

Tolerance: ISO 9906:2012 - Grade 3B

TYPE	Nominal Power (kW)	Motor Size	Q (m³/h - l/min)									
			0	250	600	900	1170	1200	1300	1400	1500	1600
			0	4167	10000	15000	19500	20000	21667	23333	25000	26667
H (m)												
pump input power (kW)												
250-400D	110	315S	38,3	39,9	39,0	35,2	28,6	27,7	24,3			
	132	315M	48,00	61,74	84,15	100,80	111,27	112,17	114,78			
250-400C	132	315M	44,0	45,8	44,9	41,2	35,4	34,5	31,3	27,4		
	160	315L	53,83	71,89	98,11	118,20	130,85	131,93	135,08	137,50		
250-400B	160	315L	50,0	51,7	51,0	47,6	42,3	41,5	38,5	34,8	30,3	
	200	315L	64,57	84,18	115,36	138,27	155,58	157,12	161,60	164,88	167,09	
250-400A	200	315L	55,7	57,4	56,5	53,0	47,9	47,1	44,3	40,8	36,6	31,7
			70,94	91,89	127,19	153,24	173,94	175,86	181,62	188,11	189,07	190,57