

Customer


Technical data

Glanded monobloc pump Atmos BST 40/200-7.5/2-V2

Project name: Untitled project 2024-07-24 08:55:39.272

Project ID
Installation location
Customer pos. No.

Date: 24.07.2024

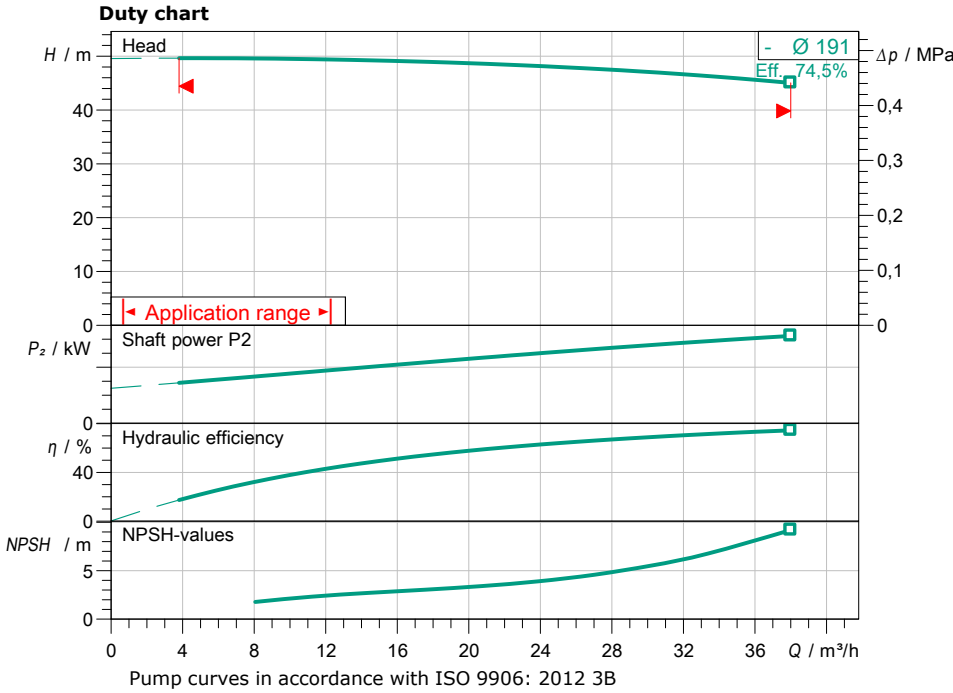

Requested data

Flow
Head
Media: Water 100 %
Fluid temperature: 20,00 °C
Density: 998,30 kg/m³
Kin. viscosity: 1,00 mm²/s

Hydraulic data (Duty point)

Flow
Head
Shaft power P_2
Hydraulic efficiency
NPSH
Impeller size: 191

Product data

Glanded monobloc pump
Atmos BST 40/200-7.5/2-V2
Max. operating pressure: 1 MPa
Fluid temperature: -20 °C ... +120 °C
Max. ambient temperature: 50 °C
Minimum efficiency index (MEI): ≥ 0.4

Motordata per Motor/Pump

Motor efficiency level: IE3
Mains connection: 3~ 400 V / 50 Hz
Permitted voltage tolerance: + -6 %
Max. speed: 2900 1/min
Rated power P_2 : 7,50 kW
Rated current: 13,70 A
Power factor: 0,88
Efficiency: 50% / 75% / 100% // %
Degree of protection: IP55
Insulation class: F
Motor protection

Fitting dimensions


Pipe connection on the suction side: DN 65, PN 16
Pipe connection (pressure side): DN 40, PN 16
Port to Port

Materials

Pump housing: 1.4301
Impeller: 1.4301
Shaft: 1.4301
Shaft seal: B3Q1EF

Information for order placements

Weight approx.
Item number: 9187067

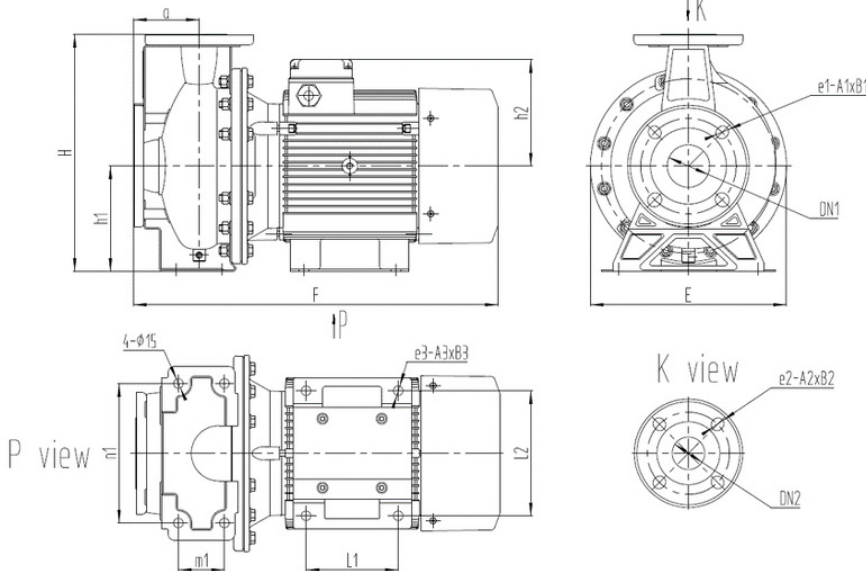

Dimensions

mm

A	100	H1	160	DNd	DN 40, PN 16
B1	20	H2	162		
B2	20	L1	140		
e	298	L2	190		
H	360	DNs	DN 65, PN 16		

Hydraulic data

Glanded monobloc pump
Atmos BST 40/200-7.5/2-V2


Project name: Untitled project 2024-07-24 08:55:39.272

Project ID
Installation location
Customer pos. No.

Date: 24.07.2024

Operating data

Speed 2912 1/min	Frequency 50 Hz	Duty point Q =	H =	Suction port DN 65	Discharge port DN 40
----------------------------	---------------------------	--------------------------	------------	------------------------------	--------------------------------

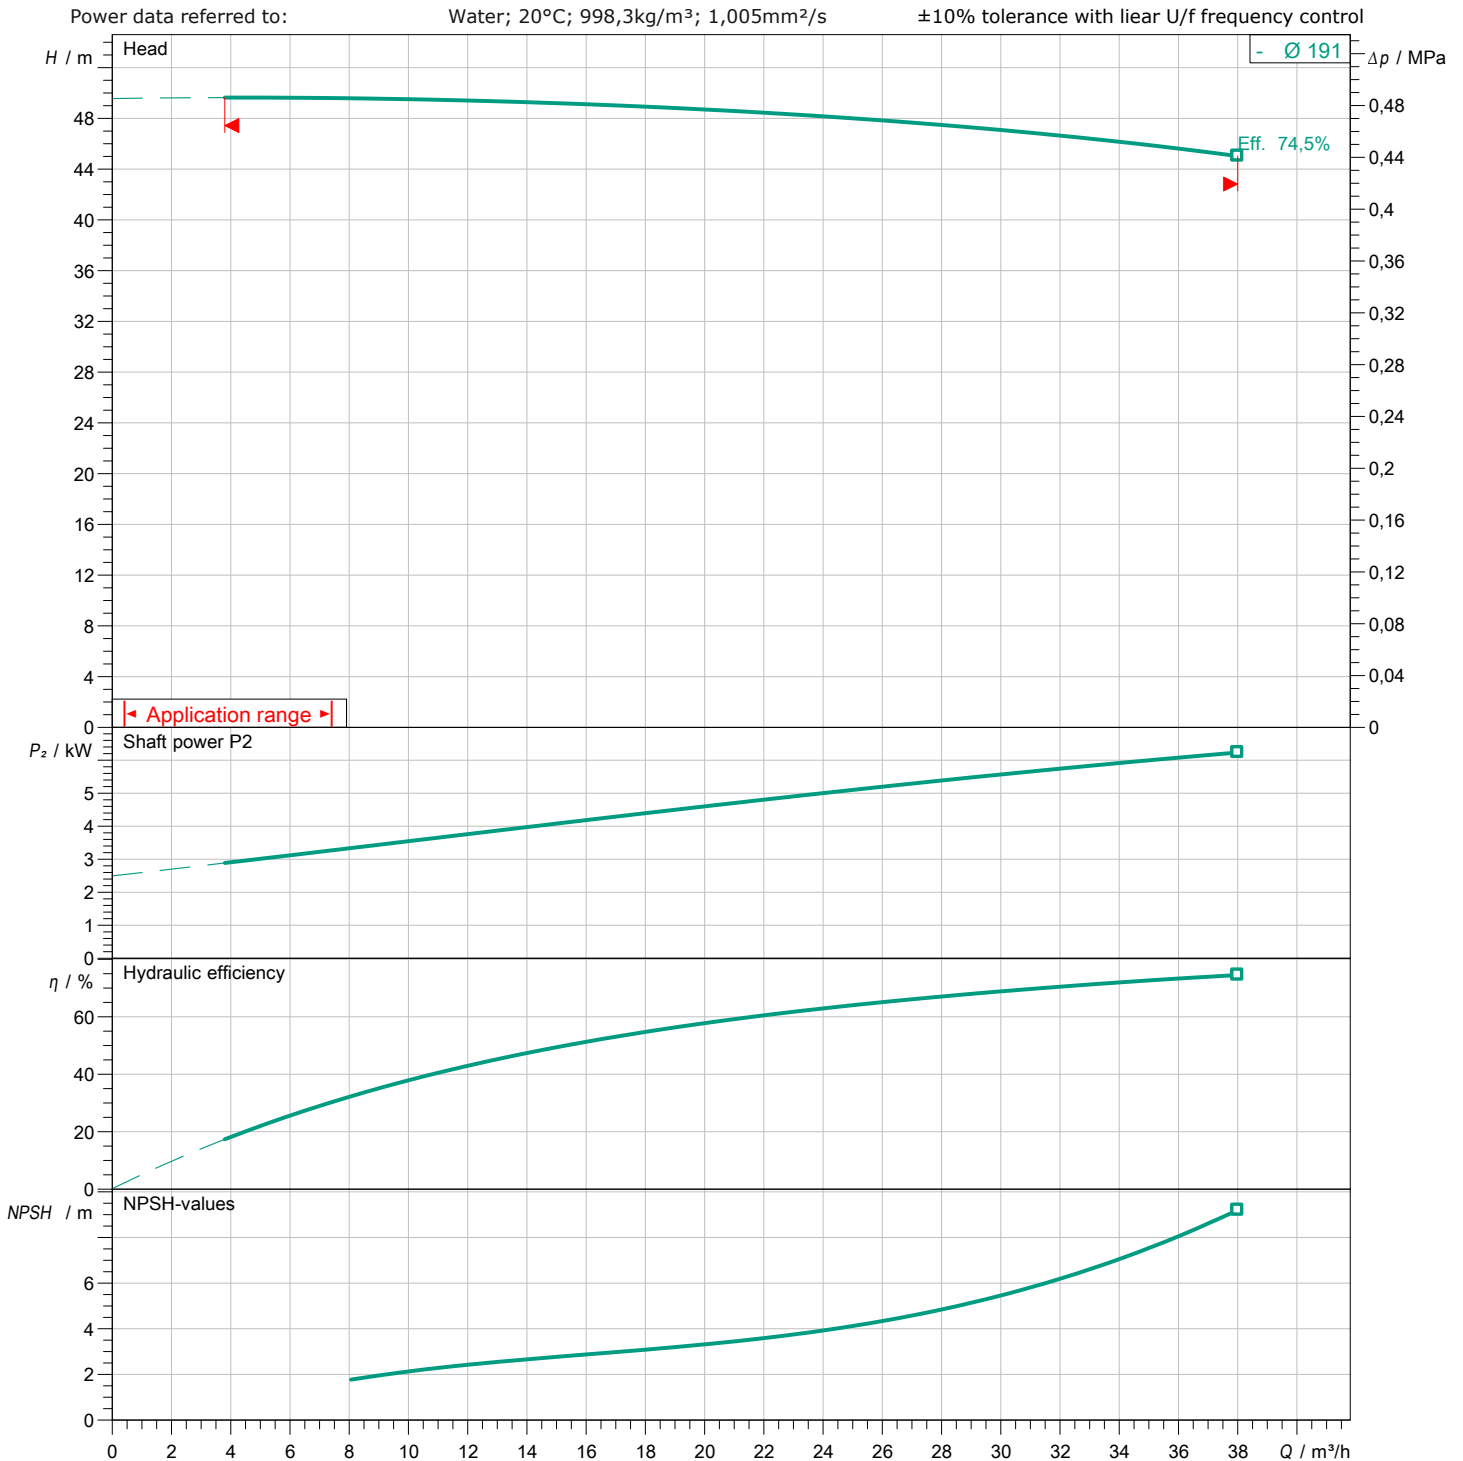

Contact
E-mail
Phone

Customer

Contact
E-mail
Phone


Dimensions

Glanded monobloc pump
Atmos BST 40/200-7.5/2-V2

Project name Untitled project 2024-07-24 08:55:39.272

Project ID
Installation location
Customer pos. No.

Date 24.07.2024

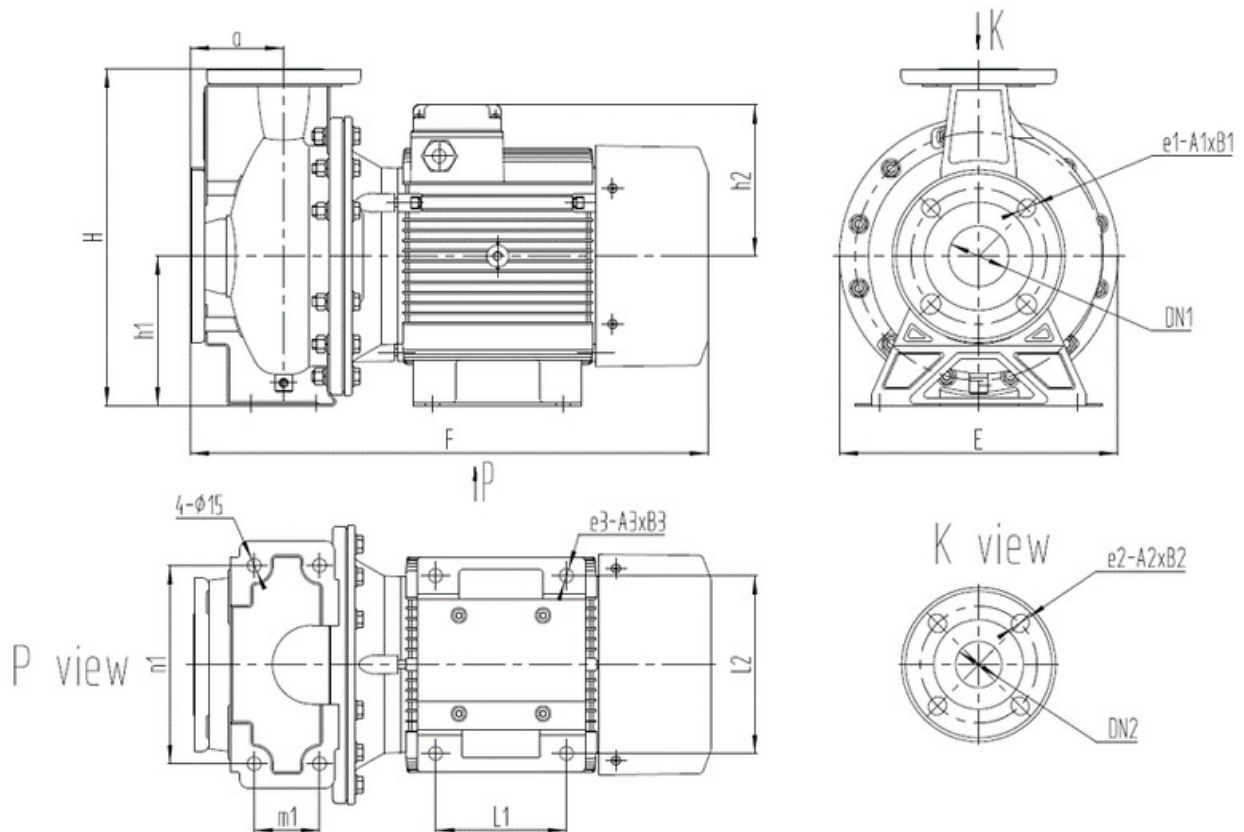

Standard

Suction side DN 65, PN 16
Discharge side DN 40, PN 16

Dimensions mm

Name	Value	Name	Value	Name	Value	Name	Value
A	100	L1	140				
B1	20	L2	190				
B2	20	DNs	DN 65, PN 16				
e	298	DNd	DN 40, PN 16				
H	360						
H1	160						
H2	162						